

Molift

Hoists, slings & transfer aids Catalogue EN

oetac[®]



| İ | Sit-to-stand solutions Molift Raiser Pro |
|------------|---|
| <u>v</u> i | Mobile Hoists12Molift Smart 150 |
| | Ceiling HoistsMolift Nomad19Molift Air20Molift Rail System22Sling bars for Molift ceiling hoists24Molift Quattro25Molift Duo26 |
| | Stretchers Molift RgoSling Fabric Stretcher |
| Q | Molift RgoSling 4-pointMolift RgoSling HighBack32Molift RgoSling MediumBack32Molift RgoSling Toilet33Molift RgoSling Amputee33Molift RgoSling Shadow34Molift RgoSling Comfort HighBack34Molift RgoSling Ambulating Vest35Molift RgoSling Fabric Stretcher35Molift RgoSling MediumBack Plus37Molift RgoSling Repositioning sheet37 |
| | Molift EvoSling 2-pointMolift EvoSling HighBack |
| | Molift Slings accessories |



Molift products are designed for life

Molift products are designed to give users a better quality of life while providing caregivers with the best support and optimum work environment. Our objective is to make solutions that improve the quality of life each day for users and give caregivers a safer working environment, enabling them to focus more of their time and energy on the users.

Best in class - Lasting durability

Molift products give disabled people the opportunity to make the most of life - go to school, work and travel - a better life through safe, efficient and comfortable transfer solutions. Molift transfer solutions are designed to be the best in class when it comes to product quality, reliability and durability.

The Molift story

Molift became a part of Etac 2010. The brand was founded more than 30 years ago in Norway by Hans Kasper Andresen. A Norwegian inventor, engineer and designer who, through his own experience (he was hospitalised due to a heart attack), saw the need for lifting and moving users in a secure way.



Molift Air

Molift Air is a small, flexible and strong ceiling hoist with an emphasis on high safety and long cost-effective lifetime. It is easy to handle, easy to move and easy to install and together with Molift Rail System it is a perfect match. Read more about Molift Air and Rail System in the chapter "Ceiling hoists"

Stable lifting and increased dignity

Molift hoists are equipped as standard with 4-point sling bar. The 4-point sling bar provides a very stable and safe lifting experience. Users enjoy a free, open sitting position with plenty of room for the head and upper body, they can feel comfortable and secure when sitting. No straps or parts of the hoist are inconveniently close. Combined with the Molift RgoSling, they provide extraordinary comfort and correct positioning from lying to sitting and vice versa as the sling loops glide automatically into position during hoisting. Most of the Molift hoists are also equally available with 2-point sling bars.



Secure, efficient and outstanding

With the increasing need for efficiency in the healthcare sector and a growing focus on users' and caregivers' needs and safety, top class transfer products are essential.

Cost effective solutions

Studies show that manual lifting and other user-handling tasks are high-risk activities for both carers and users. The aim for Molift products is to give the best and most secure user care, avoid heavy lifting situations which can put caregivers' backs at risk, while at the same time as providing the healthcare sector with the most cost effective solutions. Research and studies over for the past 20 years have shown that the costs of proper equipment are far lower than those associated with carers' work related injuries.

Our standards

Molift is certified according to the ISO standards for our trade. This affects how we drive and safeguard the quality of our products and our processes.

Systems for quality assurance

We are certified according to ISO 9001, which means that all our work processes, from product development and production to the products and their delivery meets the most stringent quality requirements.

Traceability

Molift meets all the requirements of ISO 13485 with regard to traceability of our products. All our hoists and slings have bar codes and unique serial numbers to facilitate traceability for our distributors on their market.

Environmental requirements

We work continuously to minimise the impact of our operation on the environment, and we are certified according to ISO 14001. This standard contains legal requirements on raw materials, emissions, recycling and power consumption.

5

www.etac.com





Sit-to-stand solutions

Molift's sit-to-stand aids are based on the same ergonomic principles. The products imitate the natural pattern of movement and fulfill the transfer needs of users with some weight bearing capacity.

Molift Raiser Pro

The ergonomic platform for a safe and active sit-to-stand transfer

Early mobilization and rehabilitation

Molift Raiser Pro allows the user to use their own muscle power during a transfer. The natural movement pattern stimulated and the ergonomic design makes the user feel safe during the transfer. Raiser Pro helps the user to rehabilitate in all health environments during every transfer so that mobilization can begin early, already in the intensive care unit.

The stability and maneuverability make Raiser Pro ideal in confined spaces, such as toilets.

Features

- A versatile handle with a soft warm feeling, with an an optimal grip for both the user and the caregiver.
- The handle has two different fixing heights for accessories.
- Soft padded legrest with side support, height adjustable with only one hand.
- A central brake mechanism with a one-foot touch that gives audible feedback when activated.
- Low step-on height of 35 mm.

Accessories



Safety strap - Raiser Strap

Provides support around the back or hips when standing up.

| S/M Item no. | 32508 |
|--------------|-------|
| L/XL Item no | 32509 |



Safety strap with sliding function – Raiser Strap+



Raiser Belt



| Product | | Item no. | Material | |
|-------------------|---------|----------|--|--|
| Molift Raiser Pro | | 16090204 | Powder coated aluminum, plastic, steel, chrome 3 | |
| Dimensions | | | max max | |
| Height | 1200 mm | | Alk, pH (70%) 8-9 (70%) 8- | |
| Width | 540 mm | | | |
| Depth | 630 mm | | For more information visit etac.com | |
| Weight | | | | |
| Total weight | 10,7 kg | | | |

www.etac.com Sit to stand solutions





Etac Turner Pro

A sit to stand aid with intuitive design and a small footprint

Safe transfers

Etac Turner Pro is a turn aid with a functional design that offers safe patient turning with standing support. This turn aid enables a good posture and minimises the risk of injury to the carer when transferring. Moreover, it encourages natural standing and sitting movement for the user. The only adjustment necessary is the height of the leg support and the handle. Thereafter, the transfer can be performed safely whilst the caregiver and user can maintain eye contact and communication.

The orange handle provides a strong, high contrasting colour which can help users with impaired vision or dementia. The small footplate makes it the perfect choice of transfer aid when transferring in tight spaces.

Etac Turner Pro is easy to transport due to its low weight of only 7,5 kg, furthermore it is compact and easy to grip.

Features

- Easy to transport due to a low weight of only 7.5 kg.
 It is compact, evenly balanced and easy to grip.
- The angled leg support is soft and comfortable and provides lateral support. Easy to adjust to whatever height is needed.
- The orange handle provides a strong, high contrasting colour which can help users with impaired vision or dementia.
- The cast aluminium base plate with integrated anti slip function is easy to turn. Works well on different flooring materials including carpets.



| Product | Dimensions | Item no. | Material | |
|--------------------------|---------------|----------|---|-----|
| Etac Turner Pro | 800 - 1200 mm | 16090106 | Cast aluminium, powder coated steel, chrome 3 | |
| Dimensions | | | MAIK, 12H 770°C 200 441 | |
| Lower leg support height | 150 mm | | 7 Alk. pH 70% 5-9 158°F 200 441 bs | 7) |
| Lower leg support width | 380 mm | | | |
| Baseplate diameter | 400 mm | | For more information visit etac.com | |
| Weight | | | | |
| Total weight | 7.5 kg | | | |

8 Sit to stand solutions Molift | by Etac

Molift Quick Raiser 205

An ergonomic sit to stand hoist with outstanding lifting capacity

Stable, safe and compact

Molift Quick Raiser 205 is a state of the art sit-to-stand hoist, with an electrically adjustable leg base. The hoist is comfortable, stable and safe with exceptional manoeuvrability. The hoisting of Molift Quick Raiser 205 imitates the natural pattern of movement and fulfils the transfer needs of users with some weight bearing capacity.

The unique wheel position, angled push bar and the extraordinary weight distribution of the base, provides a small turning radius. With the small castor option, it fits under most beds and chairs while the electrically adjustable legs enable accessibility almost everywhere. The fixed-leg option benefits a very small footprint.

Features

- Ergonomic design the inclined column encourages a natural pattern of movement.
- Active 4-point Lifting arm provides, together with RgoSling Active, extra support when hoisting from sit to stand.
- Easy to operate in moving and handling situations; toilet, sit-to-stand and stand-up training.
- Automatic Warning for periodic inspection and service.



| Molift Quick Raiser 205 | | Model i | tem no. | Weight | | |
|---|-------------------|---|--|--|--|--|
| Model | Battery | Adjustable leg | Fixed leg (FL) | Total weight (FL) | 44 (42,5) kg | |
| Active 4-point, castor size Ø75mm | | 29000 | 29150 | | | |
| Active 4-point, castor size Ø100mm | SLA | 29100 | 29200 | Dimensions | | |
| StandUp 2-point, castor size Ø75mm | SLA | 29001 | 29151 | External width of wheelbase | 620 mm | |
| StandUp 2-point castor size Ø100mm | | 29101 | 29201 | Internal width of wheelbase | 200 mm | |
| Active 4-point, castor size Ø75mm | | 29002 | 29152 | Height of footboard: | | |
| Active 4-point, castor size Ø100mm | Lithium | 29102 | 29202 | Castor size Ø 75/50mm | 65 mm | |
| StandUp 2-point, castor size Ø75mm | Littiiuiii | 29003 | 29153 | Castor size Ø 100/75mm | 90 mm | |
| StandUp 2-point, castor size Ø100mm | | 29103 | 29203 | , | | |
| or complete variant matrix, contact your lo | ocal distribut | or. | | Technical | | |
| or complete variant matrix, contact your lo | ocal distribut | or. | ı no. | Technical Battery SLA Battery Litium | SLA 24V 2,9 Ah LiFePO4 25,6V 2,4 Ah | |
| Accessories | | Item | - | Battery SLA Battery Litium Charge time | LiFePO4 25,6V 2,4 Ah 6 hours | |
| | Size | Item 2910 | 0061 | Battery SLA Battery Litium Charge time Rated performance | LiFePO4 25,6V 2,4 Ah 6 hours 100 hoists/75 kg/500 mm | |
| Accessories StandUp 2-point lifting arm | Size | Item | 0061 t page | Battery SLA Battery Litium Charge time Rated performance Lifting Range | LiFePO4 25,6V 2,4 Ah 6 hours 100 hoists/75 kg/500 mm 600 mm | |
| Accessories StandUp 2-point lifting arm StandUp slings | Size | Item 2910 see matrix on nex | 0061 t page 0065 | Battery SLA Battery Litium Charge time Rated performance Lifting Range Turning radius | LiFePO4 25,6V 2,4 Ah 6 hours 100 hoists/75 kg/500 mm 600 mm 1150 mm | |
| Accessories StandUp 2-point lifting arm StandUp slings Paediatric Footplate Set of inlays for footplate | Size | Item 2910 see matrix on nex 2910 | 0061 t page 0065 0151 | Battery SLA Battery Litium Charge time Rated performance Lifting Range Turning radius Hoisting speed 75 kg | LiFePO4 25,6V 2,4 Ah 6 hours 100 hoists/75 kg/500 mm 600 mm 1150 mm 35 mm/s | |
| Accessories StandUp 2-point lifting arm StandUp slings Paediatric Footplate | Size | 2910 see matrix on nex 2910 2920 | 0061 t page 0065 0151 | Battery SLA Battery Litium Charge time Rated performance Lifting Range Turning radius | LiFePO4 25,6V 2,4 Ah 6 hours 100 hoists/75 kg/500 mm 600 mm 1150 mm | |
| Accessories StandUp 2-point lifting arm StandUp slings Paediatric Footplate Set of inlays for footplate Leg support, bracket and cushions | Size | 2910 see matrix on nex 2910 2920 2910 | 0061 t page 0065 0151 0059 | Battery SLA Battery Litium Charge time Rated performance Lifting Range Turning radius Hoisting speed 75 kg | LiFePO4 25,6V 2,4 Ah 6 hours 100 hoists/75 kg/500 mm 600 mm 1150 mm 35 mm/s | |
| Accessories StandUp 2-point lifting arm StandUp slings Paediatric Footplate Set of inlays for footplate | Size Small Large | 2910 see matrix on nex 2910 2920 2910 2910 | 0061 t page 0065 0151 0059 0056 | Battery SLA Battery Litium Charge time Rated performance Lifting Range Turning radius Hoisting speed 75 kg | LiFePO4 25,6V 2,4 Ah 6 hours 100 hoists/75 kg/500 mm 600 mm 1150 mm 35 mm/s | |

www.etac.com Sit to stand solutions






Molift RgoSling Active

The ideal sling solution for active transfers with Molift Quick Raiser 205

Comfort and easy transfer

Molift Sit to Stand slings are padded and developed for active hoisting together with Molift Quick Raiser 205. The slings provides perfect lumbar support and are the ideal solution for hoisting and moving between different sitting positions. The slings have an efficient anti-slip lining to prevent the sling from sliding up. The waist belt provides additional support and stability.

Molift RgoSling Active is designed for a 4-point lifting arm and has sliding loops for the possibility to an optimal posture during the sit to stand movement. Molift RgoSling Active provides additional grip and support around the hips when standing. The wide back-support distributes weight and pressure evenly over a large surface, which makes it very comfortable for the user.



Molift RgoSling Active



Molift RgoSling StandUp

Molift RgoSling StandUp is designed for a 2-point lifting arm. It is quickly and easily placed around the user. By virtue of the design it is ideal for use in toilet situations.



RgoSling Active and Quick Raiser 205 with 4-point lifting arm

Features

- Perfect solution for hoisting and moving between different sitting positions.
- Self-adjusting sliding loops (RgoSling Active).
- Large and firm support.
- Easy application.

| Molift RgoSling | Size | Waist (mm) | Item no. |
|------------------------------|------|------------|----------|
| | XS | 500-720 | 1720910 |
| | S | 590-830 | 1720920 |
| Active 4-point | M | 730-950 | 1720930 |
| | L | 960-1210 | 1720940 |
| | XL | 1200-1390 | 1720950 |
| | XS | 530-710 | 1720710 |
| | S | 640-850 | 1720720 |
| StandUp 2-point | M | 740-960 | 1720730 |
| | L | 930-1220 | 1720740 |
| | XL | 1150-1430 | 1720750 |
| | XS | 530-710 | 1720810 |
| Standilla 2 paint | S | 640-850 | 1720820 |
| StandUp 2-point with support | M | 740-960 | 1720830 |
| with Support | L | 930-1220 | 1720840 |
| | XL | 1150-1430 | 1720850 |

Information

For more information regarding Active and StandUp lifting arms, see previous..

For complete variant matrix, contact your local distributor.

Material

Polyester











For more information visit etac.com

10 Sit to stand solutions Molift | by Etac





Mobile Hoists

Molift mobile hoists are well known for many innovative and intuitive solutions such as the 4-point sling bar, integrated service software, a compact lightweight design and an ergonomic, user friendly push handles.





Molift Smart 150

Light, foldable and transportable without tools

Compact smartness

Molift Smart 150 is designed to be easily wheeled and transported to where it is required. It is designed for home care, travelling and easy storage. Molift Smart 150 is foldable in one piece without using any tools.

Due to its low weight, the small footprint and the unique construction, Molift Smart 150 is easy to manoeuvre even in narrow spaces. The hoisting range of 270–1680 mm provides an excellent maximum hoisting height and at the same time gets very low, can lift from the floor. The 4-point sling bar ensures a comfortable and spacious hoisting position for the user.

Molift Smart 150 has been awarded for Design Excellence by the Norwegian Design Council.

Features

- Comfortable and spacious hoisting.
- Compact and foldable without tools.
- Low weight and small footprint.
- Lift from floor.

Leg height

Dimensions folded

Hoisting height

Easy to manoeuvre.





Molift Smart 150 folded

Width chassis, legs open inner (mm)

Width chassis, outer (mm)



Soft travel bag



Travel suitcase

| Product | Item no. |
|------------------------------------|----------|
| Molift Smart 150 (incl. sling bar) | 10200 |
| Accessories | Item no. |
| Soft travel bag | 3049177 |
| Travel suitcase | 0990200 |
| Dimensions | |
| ength | 1200 mm |

Weight Total Weight

Hoisting interval

Technical

110 mm

210-1665 mm

L1160 x W475 x H360 mm

Battery
Battery charge time
Hoisting speed
Rated performance

26 kg NiMH 14.4 V – 2.6 Ah approx. 3 hours

40 hoists/75 kg/500 mm

1410 mm

925 mm

660 mm

60 mm/sec

Material
Aluminium, steel







For more information visit etac.com

12 Mobile hoists Molift | by Etac

Molift Partner 255

The flagship of Molift's mobile hoists - with vertical hoisting pattern for excellent stability

Ideal solution for critical care

Molift Partner 255 provides an ideal solution for hoisting in acute and critical care areas in both hospitals and care facilities. The straight vertical column in combination with the fixed sling bar provides excellent stability. It maintains the user at the same distance from the column throughout the hoisting. With an outstanding hoisting range, Molift Partner 255 allows hoisting from the floor as well as high surfaces.

Molift Partner 255 is one of the lightest in its category and combined with excellent construction, ergonomic design and the caster solution, it becomes very easy to manoeuvre even with a lifting capacity of 255 kg.

Molift Partner 255 is available in several variants for the possibility of optimizing the product according to needs; low base chassis, supporting arms for gait/walk training and weight scale.

Features

- High safe working load 255 kg
- Fixed sling bar and straight vertical column for safe and stable hoisting
- Low weight and easy to manouver
- Suitable for use with Molift stretcher



| Product | Item no. | Dimensions | | Technical | |
|---------------------------------------|------------------------------------|---|------------------------|---------------------------------------|----------------------------|
| Molift Partner 255 incl. s | sling bar 13000 | Length | 1285 mm | Battery | NiMh 26,4 V-2,6 A |
| For complete variant matri | x, contact your local distributor. | Chassis width (outer) Chassis width (inner) | 700 mm 550 mm | Battery charge time Hoisting speed | approx. 3 hour 30 mm/se |
| Accessories | Item no. | Chassis width, open legs (inner) Hoisting height | 1065 mm 390-1680 mm | Rated performance | 50 hoists/75 kg/500 mr |
| Casters ø100mm | 1320140 | Hoisting interval | 1290 mm | Material | |
| with directional lock | 1320140 | Leg height | 115 mm | Aluminium, Steel | |
| Weight scale | (see page for sling bars) | | | Aluminium, Steel | |
| Sling bars | (see page for sling bars) | Weight | | △ □ △ max • | may |
| Stretchers For more information visit | (see page for stretchers) | Total weight | 42.5 kg | Alk. PH 255 kg | 562 |

www.etac.com Mobile hoists 13



Molift Mover

A family of compact, lightweight mobile hoists with great flexibility and large hoisting range. Suitable in homes, hospitals and care environments.

Large hoisting range

Molift Mover has a lightweight aluminium construction that makes the hoist very easy to manoeuvre. The low weight in relation to lifting capacity is the best in class. A large hoisting range allows hoisting from high surfaces as well as hoisting from the floor. The integrated Molift Service Tool ensures correct service and maintenance intervals.

Ergonomic handling

For improved caregiver ergonomics, the Molift Mover hoists are equipped with Molift's unique intuitive push handle. The handle provides multiple and flexible grip possibilities for improved caregiver ergonomics. The easily accessible hand control is very user friendly.

Features

- A lightweight and compact hoist
- Very easy to manoeuvre
- Large hoisting range
- Hoisting from floor

Molift Mover 180

Molift Mover is suitable for transfer situations in home, hospital and care environments. Optional 2- or 4-point sling bar with quick release.



| Molift Mover | | Item no. | |
|---|-----------------|-----------|-----------|
| Variants (excl. sling bar) | Mover 180 | Mover 205 | Mover 300 |
| Standard chassis, small casters | 18000 | 14000 | 15050 |
| Standard chassis, large casters | 18003 | - | |
| Low base chassis | - | 14050 | |
| Standard chassis + supporting arms | - | 14150 | 15150 |
| Medium base chassis + supporting arms | - | - | 15151 |
| For complete variant matrix, contact your loc | al distributor. | | 1010 |
| | | | |

| Medium base chassis + supporting arms | - | - | 15151 | |
|---|-----------------|--------|--------|------------|
| For complete variant matrix, contact your loc | al distributor. | | | Alk |
| Accessories | | Iter | n no. | For more i |
| Supporting arms | | see et | ac.com | |

| Accessories | Item no. |
|---|-------------------------|
| Weight scale | see page for sling bars |
| Sling bars | see page for sling bars |
| Stretchers | see page for stretchers |
| Casters ø100mm with directional lock for Molift Mover 205 and 300 | 1320140 |



information visit etac.com



14 Mobile hoists Molift | by Etac

Molift Mover 205

Molift Mover 205 is a workhorse for frequent and everyday use, suitable for transfer situations in nursingcare and hospital settings. A quick release function provides optional 2- and 4-point sling bars in different dimensions. A hoist with great flexibility and many accessories.

Molift Mover 300

Molift Mover 300 has the high hoisting capacity of 300 kg. It is the ideal solution for hospitals and care facilities with bariatric clients who have frequent and everyday moving and handling needs. With its low weight and high capacity, it is one of the lightest in its category.





Molift Mover 300 with supporting arm

| Facts | Molift Mover 180 | Molift Mover 205 | Molift Mover 30 |
|--------------------------------------|---------------------------|---------------------------|-------------------------|
| for Standard chassis excl. sling bar | | | |
| Maximum user weight (SWL) | 180 kg | 205 kg | 300 k |
| Total weight | 32 kg | 37.6 kg | 40.1 k |
| Length | 1260 mm | 1285 mm | 1285 mi |
| Chassis width (outer) | 700 mm | 700 mm | 700 mi |
| Chassis width (inner) | 550 mm | 550 mm | 550 m |
| Chassis width, legs open (inner) | 1025 mm | 1065 mm | 1065 mi |
| Leg height | 105 mm | 115 mm | 115 mi |
| Battery | NiMH 14.4 - 2.6 Ah | NiMH 26.4 V - 2.6 Ah | NiMH 26.4 V - 2.6 A |
| Battery charge time | 3 hrs | 3 hrs | 3 hı |
| Hoisting height | 270-1630 mm | 2093 mm | 2100 mi |
| Hoisting interval | 1365 mm | 1431 mm | 1420 mr |
| Hoisting speed | 40 mm/sec | 40 mm/sec | 32.6 mm/se |
| Rated performance | 50 hoists/75 kg /500 mm | 50 hoists/75 kg /500 mm | 50 hoists/75 kg /500 mr |
| Service Software | Included | Included | Include |
| Material | Aluminium, steel, plastic | Aluminium, steel, plastic | Aluminium, steel, plast |





Sling bars for Molift mobile hoists

Lightweight sling bars with quick release coupling for easy change

Molift aluminium sling bars fit new and older hoists. The lightweight sling bar has a quick-release coupling, which makes it very easy for the caregiver to change.

The weight scale is class III approved and complies to all technical standards. It can calculate BMI (Body mass index) at the touch of a button.



Mover 180 2-point sling bar

Aluminium/zink, SWL 300 kg

| Small | 1830043 |
|--------|---------|
| Medium | 1830042 |
| Large | 1830041 |



Mover 205 2-point sling bar incl weight scale

Aluminium/zink, SWL 300 kg

| Small | 1430120 |
|--------|---------|
| Medium | 1430121 |
| Large. | 1430122 |



Mover 180 4-point sling bar

Aluminium/zink, SWL 300 kg

| Small | 1830110 |
|-------------|---------|
| Medium | 1830111 |
| Large | 1830112 |
| Extra large | 1830113 |



Mover 205/300 4-point sling bar incl weight scale

Aluminium/zink, SWL 300 kg

| Medium | 1530110 |
|--------|---------|
| Large | 1530111 |



Weight scale Mover 180

SWL 300 kg

| Scale. | 1840000 |
|--------|---------|



Partner 255 4-point sling bar

Aluminium/zink, SWL 255 kg

Medium......1330160



Mover 205 2-point sling bar

Aluminium/zink, SWL 300 kg

| Small | 1430117 |
|--------|---------|
| Medium | 1430116 |
| Large | 1430115 |



Partner 255 8-point sling bar

Steel, SWL 255 kg

Medium.....2140002



Mover 205/300 4-point sling bar

Aluminium/zink, SWL 300 kg

| Medium | 1530101 |
|-------------|---------|
| Large | 1530102 |
| Extra large | 1530103 |



Weight scale Partner 255

SWL 300 kg

| Dimensions (mm) | Small | Medium | Large | Extra large |
|-------------------|--------------------|---------------------|--------------------|--------------------|
| 2-point Sling bar | H130 x L350 | H130 x L450 | H130 x L550 | - |
| 4-point Sling bar | H210 x W300 x L350 | H240 x W300 x L450 | H240 x W350 x L550 | H240 x W350 x L650 |
| 3-point Sling bar | | H420 x W920 x L1430 | | |

16 Mobile hoists Molift | by Etac

Molift Service Tool


The software that interacts with the hoist

Ensuring correct service and maintenance

All Molift hoists have an integrated service software that indicates when a service is necessary. This ensures user, caregiver and management that the hoist is safe in relation to applicable laws and regulations.

Molift Service Tool calculates the number of lifts and gives a warning signal when a service is required. Through Molift Service Tool, a technician can connect and interact with the hoist to perform and log service and for technical trouble-shooting. The software also allows reading, checking and adjusting key parameters in the hoist as well as logging, reading and printing the service history.

The software provides access to a product specific service checklist.

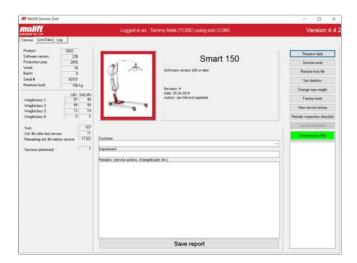

Molift Service Tool enables us to collect data about Molift hoists around the world and to continuously improve our products.

Record and analyse hoist usage

Molift Service Tool can also be used to retrieve data about hoist usage and hoisting patterns. When the data is linked to work-related injury among the employees, it can be a helpful tool for the employers to reduce injuries. Furthermore Molift Service Tool can improve efficiency as it indicates whether the types of hoists in use are suitable for the patient group and their needs.







Ceiling Hoists

Molift Ceiling Hoists and Molift Rail System are the optimal solutions to assist caregivers. The hoists are intuitive and safe to use and can solve all hoisting needs for disabled people and improve accessibility to the user and increases caregiver and user safety.

Molift Nomad

The portable low weight hoist, suitable for all day-to-day operations.

Low weight - high hoisting capacity

The weight of the Molift Nomad is only 6.8 kg. Despite the low weight it has a hoisting capacity up to 255 kg. Molift Nomad has a unique curved design and the integrated 4-point sling bar, used with any Molift sling, provides the user with a comfortable and spacious position. Molift Nomad is equipped with numerous safety features such as electronic overload protection, electrical emergency lowering and emergency stop.

Easy room-to-room transfer

Molift Nomad has integrated carry handles for easy handling. The connection is easy and no tools are required. In combination with the special designed trolley, Molift Nomad can be used to climb from one rail system to another without a transition rail. This results in easy transfer from room to room. By using Molift Nomad Extension Arm the hoist can easily be connected and disconnected to the trolley from the floor. Molift Nomad Cart is ideal for storing and transporting the hoist.

Features

- Low weight and high hoisting capacity.
- Portable ceiling hoist.
- Climbing room to room.
- Easy connection without tools to trolley.
- Integrated 4-point sling bar.



| Description | Item no. |
|-------------------------------------|----------|
| Molift Nomad 205 (SWL 205 kg) | 22205 |
| Molift Nomad 255 (SWL 255 kg) | 22255 |
| | |
| Accessories | Item no. |
| Accessories Weight scale, class III | Item no. |
| | |
| Weight scale, class III | 1100253 |

| Dimensions | |
|-----------------|------------------|
| Length Width | 522 mm 200 mm |
| Height | 330 mm |

Weight

Total weight

Technical Battery Battery charge time

NiMh 26.4 V - 2.6 Ah approx. 3 hours

6.8 kg

Hoisting speed Rated performance Hoisting range

80 hoists/75 kg/500 mm Un to 2000 mm

Material

Reinforced composite and aluminium



For more information visit etac.com





Molift Air

For a better working situation for carers and a safe and dignified quality of care for users

Dignified quality of care

Molift Air is a smart and user-friendly family of ceiling hoists, with outstanding lifting capacity. Molift Air is suitable for sitting and horizontal transfers as well as standing and gait training situations.

Together with Molift Rail System and a wide range of accessories, Air ceiling hoists offers great flexibility and eliminates strenuous manual lifting in a variety of care situations. A complete solution within patient handling, that creates a better working situation for carers and provides a better and more dignified quality of care for users.

Light and flexible

Molift Air is used with fixed ceiling rails or portable free-standing systems. The hoist is easy to remove and replace during installation and servicing, due to very low weight and the clever quick-release function. Together with all safety features, a large hoisting range and the multiple sling bar range, is this the complete solution in all health care settings.

Molift Air can easily be adapted to other manufacturers rail systems on the market.

Features

- Small hoist great lifting capacity
- Flexible solutioins
- Low lifecycle cost
- Silent and soft operation.



Molift Air 200

Molift Air 200, with its lifting capacity of 200 kg, is optimized for long term care facilities, nursing homes and private properties. The hoist is charged through the handset.

| Product description | Battery | Item no. |
|-----------------------------------|---------|----------|
| Molift Air 200 | SLA | 26200 |
| Molift Air 200 | Litium | 26201 |
| Molift Air 350 | SLA | 26350 |
| Molift Air 350 | Litium | 26351 |
| Molift Air 350 Propulsion | SLA | 26352 |
| Molift Air 350 IRC and Propulsion | SLA | 26353 |
| Molift Air 350 IRC | SLA | 26354 |
| Molift Air 500 | SLA | 26500 |

| Accessories | Item no. |
|----------------------------|-------------------------|
| Sling bars | see page for sling bars |
| Weight scale | see page for sling bars |
| Room to room transfer unit | 2510295 |
| | |

Material

Aluminium, plastic





For more information visit etac.com

20 Ceiling hoists Molift | by Etac


Molift Air 350

Molift Air 350 has an outstanding lifting capacity and is optimized for long lifetime and low service costs. Molift Air 350 has several variants available; In-Rail charging, propulsion trolley and lithium battery cells.

Molift Air 500

Molift Air 500 is designed for bariatric users and has a lifting capacity of 500 kg. With the specially designed sling bar, the bariatric user can be lifted safely and securely.



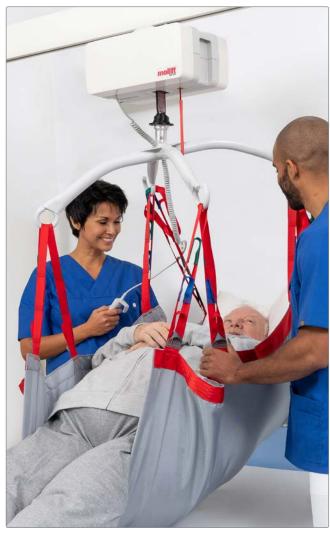

| Facts | Molift Air 200 | Molift Air 350 | Molift Air 50 |
|--|---------------------------|---|-------------------------|
| Maximum user weight (SWL) | 205 kg | 350 kg | 500 k |
| Total weight (with SLA battery) | 8.6 kg | 8.6 kg | 151 |
| Length | 360 mm | 360 mm | 360 m |
| Width | 190 mm | 190 mm | 250 m |
| Height | 195 mm | 195 mm | 195 m |
| Battery Lithium | 25.6 V LiFePO4 2.4 Ah | 25.6 V LiFePO4 2.4 Ah | |
| Battery SLA | 26.4 V SLA 2.6 Ah | 26.4 V SLA 2.6 Ah | 12 V SLA 2.9 A |
| Battery charger | 100-240 V AC, 40-60 Hz | 100-240 V AC, 40-60 Hz | 100-240 V AC, 50-60 H |
| Battery charge time | 6 hrs | 6 hrs | 6 h |
| Motor | 24 V DC | 24 V DC | 24 V E |
| Hoisting interval | 3000 mm | 2600 mm | 3000 m |
| Hoisting speed 75 kg | 60 mm/sec | 60 mm/sec | 30 mm/se |
| Expected lifetime | 30 000 lifts SWL/10 years | 30 000 liftsw SWL/10 years | 30 000 lifts SWL/10 yea |
| Molift Service Software | Included | Included | Include |
| Emergency lowering | Mechanical and electrical | Mechanical and electrical | Mechanical and electric |
| Emergency stop | Reachable t | rom floor with string. Reset possible from floo | r |
| Protection class; hand control & hoist motor | IP24 | IP24 | IP2 |

www.etac.com Ceiling hoists 21





Molift Rail System

A cost-effective and flexible solution for all environments

Efficient installation process

Molift Rail System has rail profiles with innovative solutions for integration into all types of ceilings and walls. The wide range of fixing options results in making it one of the most most efficient installation processes in the market. It is easily integrated and is aesthetically adjusted to the design and architecture of the room. The range of switches and other transition options makes the rail system extremely flexible.

Customised capacity

Depending on the different needs and choice of the hoist motor, the Molift Rail System can be constructed from 160 up to 500 kg.

Cost effective solutions

The efficient installation process, the flexibility and the many features make Molift Rail System a cost-effective, competitive and profitable investment for hospitals, institutions, health care settings and the home. This helps create a practical and efficient workplace for nurses and caregivers, as well as an attractive environment for patients and visitors.

Traverse rail system

One of the most flexible solutions on the market, covering all needs of hoisting, regardless of renewal or equipment changes in the room.

Traverse switch

Enables two different rail systems to be connected, for example between a traverse system and a single rail. Very useful for transfers from one room to another.

Single rail system


Straight rail and/or curve rails gives a simple and effective patient transfer for the most common lifting situations such as bed-to-wheelchair hoisting.

Room to room transfer

When transfer is needed from one room to another or from one rail system to the next system, Molift can provide Room to Room function (Climbing), switch systems or continuing rail systems through doorways etc.

Rail switch

Rail Switch - enables a change of direction of single rails, for example from a straight rail to a curve rail.

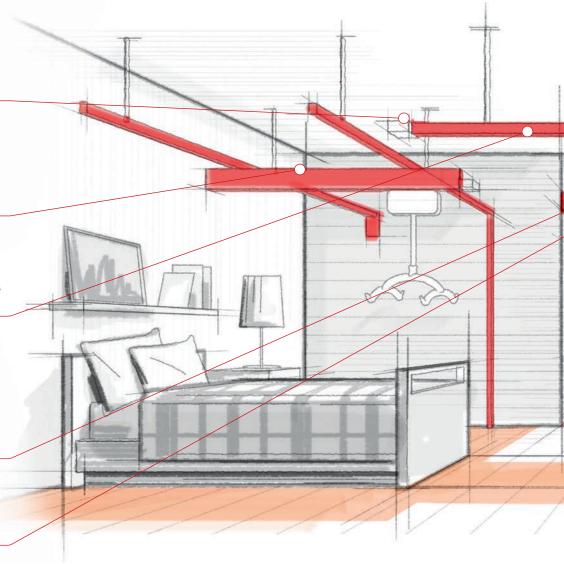

22 Ceiling hoists Molift | by Etac

Flexible system

- Easy to install.
- Various weight classes.
- A variety of installation options integrated in, or under the false ceiling, on the wall, on the floor with upright supports, etc.
- Can be installed in all types of ceilings, walls and floors.

Possibilities

Straight profiles Curves - 30, 45, 60 and 90 degrees Fixed brackets, telescope brackets Flexible traverse options Traverse switch Rail switch In-rail charging

Maximum user weight (SWL)

Curtain pass through

160-500 kg

Colours

White

Rails


3 dimensions: Height: 62, 112, 142 mm

Max distance between fixtures

Up to 6000 mm

Switches

Rail switch Traverse switch

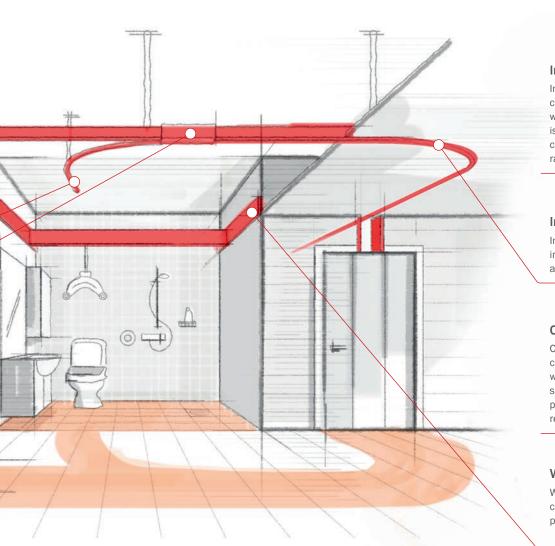

In-rail charging

In rail charging allows the hoist to charge batteries automatically anywhere in the system. This way the hoist is always ready for operation. In-rail charging can be be mounted in straight rail and traverse rail systems only.

Integrated rail

Integrated Rail System - a single integrated rail offers a very discrete and clean solution.

Curtain pass through

Curtain pass through allows gaps for curtains mounted in the ceiling of the ward. This means several beds can share one motor, and still maintain privacy when individual nursing is required.

Wall mounted rails

Wall mounted rails - if the ceiling cannot support the system, it is possible to mount the rail on the wall.







Sling bars for Molift ceiling hoists

Lightweight sling bars with quick release coupling for easy change

Molift aluminium sling bars fit new and older hoists. The lightweight sling bar has a quick-release coupling, which makes it very easy for the caregiver to change.

The weight scale is class III approved and complies to all technical standards. It can calculate BMI (Body mass index) at the touch of a button.



Molift Air 2-point sling bar

Aluminium/zink, SWL 350 kg

| Small | 2530115 |
|--------|---------|
| Medium | 2530120 |
| Large. | 2530125 |
| - 8- | |



Molift Air 4-point bariatric pigtail sling bar

Steel, SWL 550 kg



Molift Air 2-point pigtail sling bar

Aluminium, SWL 350 kg

| Small | 1830033 |
|--------|---------|
| Medium | 1830032 |
| Large | 1830031 |



Molift Air 8-point sling bar

Steel, SWL 300 kg

Medium.....2140003



Molift Air 4-point sling bar

Aluminium/zink, SWL 350 kg


| - | |
|-------------|---------|
| Small | 2530210 |
| Medium | 2530211 |
| Large | 2530212 |
| Extra large | |



Weight scale Molift Air

(not available for 8-pt sling bar)

Scale SWL 300 kg.....1840000 Scale SWL 400 kg......1431021

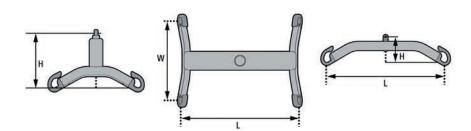

| 2-point Sling bar | H130 x L350 | H130 x L450 | H130 x L550 | |
|----------------------------|--------------------|---------------------|---------------------|--------------------|
| 2-point Sling bar pig tail | H150 x L400 | H150 x L500 | H150 x L600 | - |
| 1-point Sling bar | H210 x W300 x L350 | H240 x W300 x L450 | H240 x W350 x L550 | H240 x W350 x L650 |
| 1-point Sling bar pig tail | - | - | H200 x W550 x L 550 | - |
| 3-point Sling bar | | H420 x W920 x L1430 | | |
| ooint Siing bar | | H420 X W920 X L1430 | - | - |

24 Ceiling hoists Molift | by Etac

Molift Quattro

The temporary hoist solution with excellent stability

A free-standing traverse gantry

Molift Quattro is a free-standing hoist unit that offers a (four post) Traverse System which is the best solution for temporary hoisting needs or when the facility is not built for fixed installations. The gantry is easy to install without the need to mount additional fixtures on walls or ceilings. It is ideally suited for temporary hoist applications in nursing or private homes.

For overhead lifting situations

The traverse has a lightweight aluminium frame and four steel posts that provides excellent stability and covers the surface of the hoisting requirement. Molift Quattro solves all overhead lifting situations together with the Molift Air or Molift Nomad hoist motor and a sling. With a lifting capacity of max 300 kg, it is ideal for lifting and transferring a person from or to bed, floor, chair, wheelchair, toilet etc.

Features

- Easy to install designed for quick installation by two persons (preferably).
- No wall or ceiling mounting is required.
- Supreme stability and manoeuvrability .
- Easy to charge the hoist motor can easily be charged through the hand control or through the in-rail charging option.



| Description | Item no. |
|---------------------------|--------------|
| Molift Quattro 3 | 1600030 |
| Molift Quattro 4 | 1600035 |
| Accessories | Item no. |
| Adjustable foot (set of 4 | 1610200 |
| Dimensions | |
| Room lengths | 3000/4000 mm |

| Boom lengths | 3000/4000 mm | Height | 2330 mm | Height with adjustable foots | 2360 - 2430 mm |

Internal height 2190 mm Width/Depth 3160 - 4160 mm Maximum internal space 3000/4000 x 2190 mm The length of the posts are fixed. The lowest allowed

distance from floor to ceiling is 2400 mm.

Molift ceiling hoists, Air and Nomad are ordered separately

Weight

Total weight Quattro 3 (complete unit) 111 kg
Total weight Quattro 4 (complete unit) 132 kg

TechnicalExpected Lifetime:

30 000 hoisting cycles (SWL) or 10 years

For more information visit etac.com

Material

Steel, aluminium, plastic







www.etac.com Ceiling hoists 25



Molift Duo

A flexible and free standing gantry system for temporary hoist situations

The easy solution for most room sizes

Molift Duo offers a system that is easy to install without being fixed to the ceiling or walls. It is ideally suited to temporary hoist applications in hospitals, nursing homes or private homes. In combination with Molift Air or Molift Nomad hoist and a sling, Molift Duo solves most overhead lifting situations, whatever the environment. With a lifting capacity of 300 kg, it is ideal for lifting and transferring a person from or to; bed, floor, chair, wheelchair, toilet etc.

Lightweight construction

Molift Duo has a lightweight aluminium construction and a functional design which makes the gantry system easy to install, dismantle and move elsewhere.

This 2-post gantry system has a rail length between 2000 mm and 3500 mm and has 4 step adjustable heights up to 2550 mm, making this free standing hoist unit suitable for all bed and room sizes.

Features

- Easy to install due to the lightweight system, it is easy to install the gantry and move it to a new location.
- Supreme stability the gantry system has supreme stability and a functional design.
- Adjustable height height positions can be set at four fixed positions from 225 cm up to 255 cm.
 Adjust the height with the quick release pin.
- Charging of lift motor Molift hoist motors can easily be charged thorough the hand control or optionally through in-rail charging.



| Description | Item no. |
|-----------------|----------|
| Molift Duo 2000 | 1600013 |
| Molift Duo 2500 | 1600015 |
| Molift Duo 3000 | 1600017 |
| Molift Duo 3500 | 1600019 |

Dimensions

 Rail lengths
 2000/2500/3000/3500 mm

 Height
 2250 - 2550 mm

 Depth
 1200 mm

 Maximum internal space
 3500 x 2400 mm

Weight

Total weight (complete unit) 38 - 44,3 kg

Material

Anodized aluminium, Plastic







For more information visit etac.com

26 Ceiling hoists Molift | by Etac





Molift offers a range of accessories for different needs. One of them is the unique Molift Strecher which can be used directly on a standard Molift 4-point sling bar.





Molift RgoSling Fabric Stretcher

A soft fabric hoisting device for horizontal transfers at hospitals and institutions

The soft stretcher option

Molift RgoSling Fabric Stretcher is a soft fabric hoisting device for hospitals and institutions. It is designed for horizontal transfers. Molift RgoSling Fabric Stretcher is suitable when hoisting in a normal sling would be inappropriate due to medical conditions, for example comatose or sedated clients that require a stable recumbent position. It is a comfortable alternative to a stretcher. Molift RgoSling Fabric Stretcher is compatible with Molift Partner 255 and Molift Air.

8-point sling bar

Hoisting with this product requires an 8-point sling bar. The sling bar is compatible with Molift Partner 255 and Molift Air. Molift Fabric Stretcher has integrated hoisting straps that are hooked directly to the sling bar, with some possibilities to adjust in length by using the loops. The multiple hoisting points provide an open and stable horizontal transfer.

Features

- Molift RgoSling Fabric Stretcher is suitable when hoisting in a normal sling would be inappropriate due to medical conditions.
- The application is easily performed, with an Immedia SlingOn, when the client is in a horizontal position.
- Open and stable horizontal hoisting the 8-point sling bar with multiple hoisting points provides an open and stable horizontal transfer.





| Description | | | Item no. | Material |
|------------------------|--------------------------------|-------------------------------|----------|---|
| Molift RgoSling Fabric | Stretcher M | | 1721520 | Molift Fabric Stretch: Polyester |
| Molift RgoSling Fabric | Stretcher L | | 1721530 | |
| Molift RgoSling Fabric | Stretcher XL | | 1721540 | 60-85° |
| ength outer | Medium Large Extra large | 1750 mm 1780 mm 1830 mm | | * The safe working load will always dependent on the hoists safe working load when less than the Fabric Stretcher. |
| Vidth outer | Medium Large Extra large | 450 mm 650 mm 900 mm | | For more information visit etac.com |

28 Stretchers Molift | by Etac

Molift Stretcher

A scoop stretcher, ideal for horizontal hoisting situations

Easy to use

Molift Stretcher is a scoop stretcher for hospitals and institutions. It is designed for horizontal transfers and when sling hoisting is considered inappropriate due to medical conditions. Molift Stretcher is an optimal solution for transfer of clients who are comatose or sedated, as well as clients with suspected spinal injuries and/or multiple fractures.

Ideal for emergency care

In combination with Molift standard 4-point sling bar, it is ideal for emergency care needs, when time is critical and the patient has limited mobility. Molift Stretcher can be divided in two parts in length and is therefore easy to place under the client.

Molift Stretcher has five handles along each side, which provides a manual hoisting alternative from the floor and allows horizontal and lateral transfer between beds and surfaces.



- A unique patented scoop design, for safe and efficient moving.
- Low total weight and easy to carry.
- A safe locking system easily opened when unloaded - completely locked when loaded.
- Many possible uses and compatible with X-ray, CT and MRI. Designed for minimal shadow in X-ray.





| Description | Item no. | Dimensions | | | |
|------------------------|----------|--------------------------------------|---------------------|-------------------------------------|-----------------|
| Molift Stretcher MRI | 2150108 | Height | 126 mm | , max 🕽 max | |
| | | Length outer | 1980 mm | 60-85° 300 661 lbs | (4 |
| Material | | Width outer | 630 mm | kg Llbs | |
| Plastic composite body | | 0 | | * The SWL always dependent on the | hoists SWL when |
| Stainless steel locks | | Compatibility | | less than the stretcher. | |
| | | Molift Stretcher MRI: | | | |
| Weight | | Compatibility with MRI. Approved for | r X-ray and CT-scan | For more information visit etac.com | |
| Total weight | 14.5 kg | | | | |

www.etac.com Stretchers 29



Molift RgoSling 4-point

Molift RgoSlings offer a wide range of models and sizes ensuring we have a solution, whatever the users requirements. Molift RgoSlings are designed for a 4-point sling bar.





Molift RgoSlings

Molift has a long reputation for manufacturing high quality hoists and slings. RgoSling is a portfolio of 4-point slings developed to meet the demands for the everyday needs in healthcare.

Standard models: HighBack and MediumBack

Our standard models are designed for use in the usual transfer situations and are suitable for most users. The standard models are available in two back heights: HighBack and MediumBack.

Models with specific features

We know that users have many different requirements, so we've designed additional models with specific features to meet their needs, including the RgoSling Toilet and RgoSling Amputee.

www.etac.com Molift RgoSlings 31







Molift RgoSling HighBack

Standard leg support opening

- Sliding loops on head straps.
- Support for the entire back and the head.
- Hoisting to and from a lying or a sitting position.
- All-round sling that fits most users.
- Hoisting from floor.

HighBack padded XL - XXL 350 kg

Molift RgoSling MediumBack

Standard leg support opening

- Sliding loops on head straps.
- Suitable for a user with headcontrol.
- All-round sling that fits most users.
- Adjust the sitting angle by the leg straps.

| Size | | HighBack padded | HighBack net |
|---------|---------|-----------------|--------------|
| XXS | | 1720200 | 1720400 |
| XS | | 1720210 | 1720410 |
| S | | 1720220 | 1720420 |
| M | | 1720230 | 1720430 |
| L | | 1720240 | 1720440 |
| XL | | 1720250 | 1720450 |
| XXL | | 1720260 | 1720460 |
| Maximum | user ma | ss: 300 kg | |

| Size | MediumBack padded | MeduimBack net |
|------|-------------------|----------------|
| XXS | 1720100 | 1720300 |
| XS | 1720110 | 1720310 |
| S | 1720120 | 1720320 |
| M | 1720130 | 1720330 |
| L | 1720140 | 1720340 |
| XL | 1720150 | 1720350 |
| XXL | 1720160 | 1720360 |

Maximum user mass: 300 kg MediumBack padded XL - XXL 350 kg

32 Molift RgoSlings Molift | by Etac

33



Molift RgoSling Toilet

Wide leg support opening

- Fixed loops.
- Easy access sling, facilitate dressing and undressing.
- For users with good core stability and muscle tonus.
- Comfortable padding.
- Flexible leg support.
- Belt included for extra security.

Molift RgoSling Amputee

Narrow leg support opening

- Sliding loops on head straps.
- For users with an amputated leg or a user with reduced core stability or muscle tonus.
- Ideal solution for user with a high amputee.
- Comfortable padding.
- Belt included for extra security.

| Size | LowBack | HighBack | Size | MediumBack | HighBack |
|------|---------|----------|------|------------|----------|
| XXS | 1720500 | 1720600 | XXS | 1721100 | 1721200 |
| XS | 1720510 | 1720610 | XS | 1721110 | 1721210 |
| S 📕 | 1720520 | 1720620 | S | 1721120 | 1721220 |
| M | 1720530 | 1720630 | M | 1721130 | 1721230 |
| L | 1720540 | 1720640 | L | 1721140 | 1721240 |
| XL | 1720550 | 1721450 | XL | 1721150 | 1721250 |
| XXL | 1720560 | 1720660 | XXL | 1721160 | 1721260 |







Molift RgoSling Shadow

Standard leg support opening

- Sliding loops on head straps.
- Suitable for users in moulded seats.
- No straps, seams, pockets or labes in contact with the user.
- Polyester net with thin webbing: no straps, seams, pockets or labels in the contact surface to the user.


Molift RgoSling Comfort HighBack

Full body support sling without split leg


- Full body and head support.
- Can be left in the wheelchair underneath the user.
- Polyester net which provides good ventilation.
- Red seam indicating the center line of the back, to facilitate correct application.

| Size | HighBack Size | HighBack |
|------|---------------|----------|
| XXS | 1722900 XS | 1721410 |
| xs | 1722910 S | 1721420 |
| S | 1722920 M | 1721430 |
| M | 1722930 L | 1721440 |
| L | 1722940 XL | 1721450 |
| XL | 1722950 XXL | 1721460 |

34 Molift RgoSlings Molift | by Etac









Molift RgoSling Ambulating Vest

For gait training with assistance

- 4 straps with fixed loops.
- Self tightening strap in the waist.
- Standing or balance excercise.
- Double buckles for extra security.
- Standard polyester fabric with padding.
- Padded groin straps is ordered separately.

Molift RgoSling Fabric Stretcher

A soft fabric hoisting device for horizontal transfers


- Molift RgoSling Fabric Stretcher is suitable when hoisting in a normal sling would be inappropriate due to medical conditions.
- Application easily performed.
- Standard polyester fabric with padding of the head part.
- Used with an 8-point sling bar.

| Size | | Item no | Size |
|--------|------------------------------------|---------|------|
| XXS | | 1721300 | M |
| XS | | 1721310 | L |
| S | | 1721320 | XL |
| M | | 1721330 | |
| L | | 1721340 | |
| XL | | 1721350 | |
| Size | Groin straps | Item no | |
| XXS-XS | | 1721700 | |
| S-M | single pack (order two for a pair) | 1721720 | |
| L-XL | | 1721740 | |

| Size | Width x Length | Item no |
|------|----------------|---------|
| M | 450 x 1750 mm | 1721520 |
| L | 650 x 1780 mm | 1721530 |
| XL | 900 x 1830 mm | 1721540 |





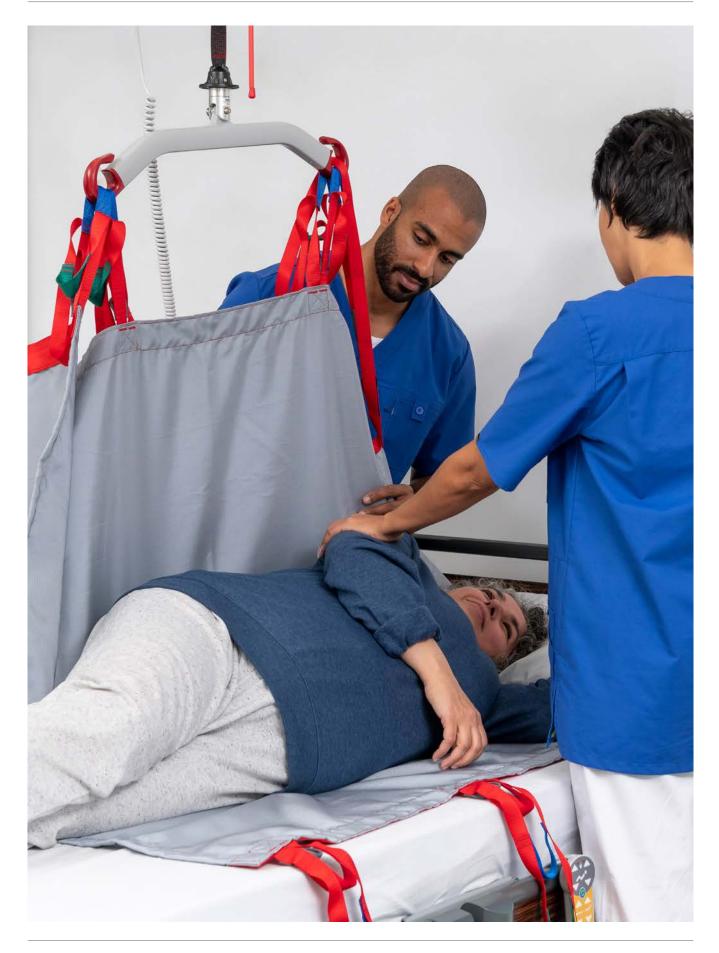


36 Molift RgoSlings Molift | by Etac









Molift RgoSling MediumBack Plus

Full body support for users weighing from 160 kg

- Provides full body support
- Straps with fixed loops and multiple height options
- Comfortable padded leg-support with dual straps
- Colour coded straps
- Split leg opening
- Can be used with a separate headrest

Molift RgoSling Repositioning sheet

An in-bed lift and positioning sheet

- Turning and transferring patients higher in the bed.
- Lifting from bed to another supine surface, stretcher etc.
- Stays in bed for comfortable and dignified care.
- Facilitates care situations saves time for caregivers.
- Colour coded straps facilitate communication when attaching the straps equally on both sides.

| Size | MediumBack Plus | Size | Quantity | Repositioning sheet |
|---------------------------|-----------------|---------------------------|----------|---------------------|
| L | 1721940 | L 1340 x W 1300 mm | 1 pc | 1721570 |
| XL | 1721950 | L 1340 x W 1300 mm | 10 pcs | 1721570-0 |
| Maximum user mass: 500 kg | | Maximum user mass: 500 kg | | |



Molift EvoSling 2-point

Molift RgoSling offer a wide range of sling models and sizes ensuring we have a solution, whatever the users requirements. Molift EvoSlings are designed for a 2-point sling bar.





Molift EvoSlings

Molift has a long reputation for manufacturing high quality hoists and slings. EvoSling is a portfolio of 2-point slings developed to meet the demands for the everyday needs in healthcare.

Standard models: HighBack, MediumBack & LowBack

Our standard models are designed for use in the usual transfer situations and are suitable for most users. They are available in three different back heights: HighBack, MediumBack and LowBack. The padded version has polyester fabric with padded back and legs and net version has polyester net with padded legrests.

Models with specific features

We know that users users have many different requirements, so we've designed additional models with specific features to meet their needs, including the EvoSling Hygiene and EvoSling Ampu.

www.etac.com Molift EvoSlings 39







Molift EvoSling HighBack

Standard leg support opening

- Support for the entire back and the head.
- Hoisting to and from lying or sitting position.
- Hoisting from the floor.
- All-round sling that fits most users.
- Net version has padded legs for extra comfort.

Molift EvoSling MediumBack

Standard leg support opening

- Suitable for a user with headcontrol.
- All-round sling that fits most users.
- Net version has padded legs for extra comfort.

| Size | HighBack padded | HighBack net padded | Size | MeduimBack padded | MediumBack net padded |
|------|-----------------|---------------------|------|-------------------|-----------------------|
| XS | 1722810 | 1722710 | XS (| 1723010 | 1723110 |
| S | 1722820 | 1722720 | S | 1723020 | 1723120 |
| M | 1722830 | 1722730 | M | 1723030 | 1723130 |
| L | 1722840 | 1722740 | L | 1723040 | 1723140 |
| XL | 1722850 | 1722750 | XL | 1723050 | 1723150 |
| XXL | 1722860 | 1722760 | XXL | 1723060 | 1723160 |

40 Molift EvoSlings Molift | by Etac



Molift EvoSling LowBack

Standard leg support opening

- Suitable for users with head control.
- Comfortable reclined sitting position.
- All-round sling that fits most users.
- Net version has padded legs for extra comfort.

Molift EvoSling Hygiene

Wide leg support opening

- Comfortable padding.
- Belt for extra security.
- For users with good core stability and muscle tonus.
- Easy access sling, facilitate dressing and undressing.

| Size | LowBack padded | LowBack net padded | Size | LowBack padded |
|------|----------------|--------------------|------|----------------|
| XS | 1722310 | 1722510 | XS | 1722210 |
| S | 1722320 | 1722520 | S | 1722220 |
| M | 1722330 | 1722530 | M | 1722230 |
| L | 1722340 | 1722540 | L | 1722240 |
| XL | 1722350 | 1722550 | XL | 1722250 |
| XXL | 1722360 | 1722560 | XXL | 1722260 |





MediumBack net padded





HighBack net



Molift EvoSling Ampu MediumBack

Narrow leg support opening

- For users with an amputated leg or a user with reduced core stability or muscle tonus.
- For user with headcontrol.
- Anti-slip material on part of the inside.
- Reclined sitting position.
- Comfortable leg padding.
- Polyester net.

Molift EvoSling Shadow HighBack

Standard leg support opening

- For users who need extra support.
- Suitable for user in moulded seats.
- Six straps gives more support, security and flexibility.
- Arms can be placed inside or outside the sling.
- Polyester net with thin webbing: no straps, seams, pockets or labels in the contact surface to the user.

| Size | MediumBack net padded | Size | HighBack |
|------|-----------------------|------|----------|
| XS | 1723210 | XXS | 1723900 |
| S | 1723220 | XS | 1723910 |
| M | 1723230 | S | 1723920 |
| L | 1723240 | M | 1723930 |
| XL | 1723250 | L | 1723940 |
| XXL | 1723260 | XL | 1723950 |

42 Molift EvoSlings Molift | by Etac



MediumBack







Molift EvoSling Comfort MediumBack

Full body support sling without split leg

- Ideal for users with joint problems or sensitivity to pain.
- Can be left in the wheelchair underneath the user.
- Polyester net, which provides good ventilation.
- Red seam indicating the center line of the back, to facilitate correct application.

Molift EvoSling FlexiStrap

Avoids heavy lifting of a leg or an arm

- Lifts a leg or arm to avoid heavy lifting.
- The FlexiStrap available in two widths.
- Padded polyester for comfortable liftning.
- Pocket on one side to facilitate application.

43

| Size | MediumBack net | Version | Width x Length | FlexiStrap |
|------|----------------|--------------------------------------|----------------|------------|
| XS | 1722610 | Molift EvoSling FlexiStrap, standard | 15 x 95 cm | 1723310 |
| S | 1722620 | Molift EvoSling FlexiStrap, wide | 25 x 95 cm | 1723330 |
| M | 1722630 | | | |
| L | 1722640 | | | |
| XL | 1722650 | | | |
| XXL | 1722660 | | | |





Molift UnoSling

Slings for short-term use are specific to a single user, a patient specific sling. An effective solution for preventing the transmission of infection.

Molfit UnoSling are designed to fit a 2-point or a 4-point sling bar.





Molift UnoSling HighBack

Standard leg support opening

- A personal disposable sling for short-term use.
- Hoisting to and from lying or sitting position.
- Support for the entire back and the head.
- For environments with a short term need for a sling,. Can be used several times by the same user.



Disposable product supplied in packaging which makes it easy to store and take out a new sling when needed.

| Size | Number in package | Art. no. |
|------|-------------------|----------|
| S | 20 | 3060020 |
| M | 20 | 3060030 |
| L | 20 | 3060040 |
| XL | 20 | 3060050 |
| XXL | 10 | 3060060 |

Disposable product

Do not wash. The UnoSling should be discarded when the user no longer needs it, or if it becomes damaged or dirty.












Facts

Materials



Polyester

The standard polyester fabric is durable and hard wearing. The material is easy to maintain and has a dirt repellent surface.



Polyester net

Hard wearing and durable soft net fabric, breathes well and dries quickly. Suitable for shower and bathing situations.



Non-woven

Polypropylene non-woven. Patient specific slings when the sling is for short term use.



Durable polyester

Extra strong durable polyester fabric for products that has a weight limit up to 500 kg. The material is easy to maintain and dries quickly.



Detailed information

| Size | Recommended user weight |
|------|-------------------------|
| XXS | 12 - 17kg |
| XS | 17 - 25 kg |
| S | 25 - 50 kg |
| M | 45 - 95 kg |
| L | 90 - 160 kg |
| XL | 160 - 240 kg |
| XXL | 230 - 300 kg |

Washing instructions











Washing temperature 60-85 $^{\circ}\text{C}$ / 140-185 $^{\circ}\text{F}$ Washing at higher temperatures wears out the material faster.





All slings have a maximum user mass of 300 kg. Some exceptions exist which are specified under each product.

46 Molift UnoSling Molift | by Etac

Molift Slings accessories



Molift EvoSling Support


Accessories for slings without head support

The head support is attached to the sling and its length can be adjusted as required using the plastic buckle. It gives the user support for the head and is a useful addition when the user requires more support.



Molift EvoSling Extension Loops

Straps for easier adjustment Used to extend the hoisting straps or to keep the leg supports together.





Molift EvoSling Soft Padding

For pressure-sensitive users

EvoSling Soft Padding consists of pressure-relieving padded sleeves which are slipped over the leg parts of slings with split-leg support. Washing $40\,^{\circ}$ C / $104\,^{\circ}$ F.



Molift Strap Marker

For marking a selected hoisting loop for head or leg support hoisting straps. Mark the hoisting loops selected during individual testing of the sling.



Molift RgoSling Extension Loops

Straps for easier adjustment RgoSling: Used to extend the hoisting straps, flexible for 3 different length. N:B: Order 2 for a pair.



Immedia SlingOn

When the user can't be turned onto their side Immedia SlingOn used with a folding technique makes it possible to appy the sling without first turning the user over to the side. Washing in 80°C or 176°F.

| Product | | item no. |
|--------------------------------------|--------------------|----------|
| Molift EvoSling Support | | 1723400 |
| Product (sold in pairs) | Size | item no. |
| Molift EvoSling Soft Padding | XS - M | 1723710 |
| Molift EvoSling Soft Padding | L - XXL | 1723740 |
| Molift EvoSling Hygiene Soft Padding | S - XXL | 1723810 |
| Product | Extension | item no. |
| Molift RgoSling Extension loops | +60, 180 or 260 mm | 1721600 |

| Product | Extension | item no. |
|--------------------------------|---------------|----------|
| Molift EvoSling Extension loop | +90 mm | 1723510 |
| Molift EvoSling Extension loop | +180 mm | 1723520 |
| Product (sold in pairs) | | item no. |
| Molift Strap Marker | | 1723600 |
| Product (sold in pairs) | Size | item no. |
| Immedia SlingOn - Small | 800 x 1000 mm | IM437/S |
| Immedia SlingOn - Medium | 800 x 1700 mm | IM438 |
| Immedia SlingOn - Large | 1200 x1500 mm | IM437 |

47



Etac is a world-leading developer and provider of ergonomic assistive devices and patient handling equipment. Our heart lies in the solutions that optimise quality of life for the individual, their family and caregivers.

For the latest news and continuously updated product information – visit: www.etac.com

Etac AB
Kista Science Tower
SE-164 51 Kista, Sweden
Tel +46 371 - 58 73 30
info@etac.se www.etac.com

